

STANDARD REPAIR DETAIL TO MODIFY TRUSS FROM TOP CHORD BEARING TO BOTTOM CHORD BEARING

MII-REP04



MiTek USA, Inc. Page 1 of 1




1. THIS IS A SPECIFIC DETAIL TO BE USED ONLY FOR ITS ORIGINAL INTENTION OF PERMITTING THE REMOVAL OF THE TOP CHORD EXTENSION. THIS DETAIL REQUIRES THAT THE REMAINING PORTION OF THE TRUSS IS UNDAMAGED.


- 2. CUT OFF TOP CHORD EXTENSION WITHOUT DAMAGING OR CUTTING THE EXISTING PLATES.
- 3. NO OTHER MODIFICATIONS ARE PERMITTED.

TRUSS BEFORE MODIFICATION:


| TOP CHORD BEARIN | G | | |
|------------------|---|--|--|
| TRUSS EXTENSION | - | | |
| | | | |

NOTES:





MODIFIED BEARING CONDITION:

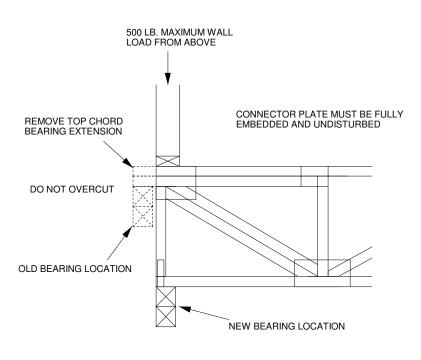

ALL OTHER FRAMING ELEMENTS ARE NOT SHOWN FOR CLARITY.