


For customer convenience, we offer a wide range of bolts specified for the MiTek product line. Each bolt is shipped with two washers and one hex nut.

Materials: Bolts and nuts are standard hex head conforming to ASTM A 307 Grade A or SAE Grade 2 or better. Washers conform to American National Standard Type A plain steel, ANSI B.22.1.

Finish: Zinc plated

Installation:

- For installation into connectors in general, install with both washers unless otherwise directing in this catalog.

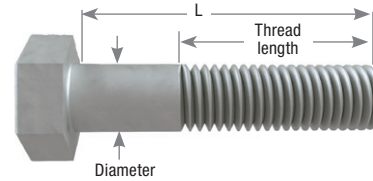

Bolt Specification Table

MiTek USP Stock No.	Description	Thread Length (in)
	Dia. x L (in)	
B384	3/8 x 4	1
B125	1/2 x 5	1-1/4
B126	1/2 x 6	1-1/4
B127	1/2 x 7	1-1/2
B128	1/2 x 8	1-1/2
B583	5/8 x 3	1-1/2
B584	5/8 x 4	1-1/2
B585	5/8 x 5	1-1/2
B586	5/8 x 6	1-1/2
B587	5/8 x 7	1-3/4
B588	5/8 x 8	1-3/4
B589	5/8 x 9	1-3/4
B5810	5/8 x 10	1-3/4
B343	3/4 x 3	1-3/4
B344	3/4 x 4	1-3/4
B345	3/4 x 5	1-3/4
B346	3/4 x 6	1-3/4
B347	3/4 x 7	2
B348	3/4 x 8	2
B349	3/4 x 9	2
B3410	3/4 x 10	2
B3411	3/4 x 11	2
B785	7/8 x 5	2
B786	7/8 x 6	2
B787	7/8 x 7	2-1/4
B788	7/8 x 8	2-1/4
B7810	7/8 x 10	2-1/4
B103	1 x 3	2-1/4
B104	1 x 4	2-1/4
B105	1 x 5	2-1/4
B106	1 x 6	2-1/4
B107	1 x 7	2-1/2
B108	1 x 8	2-1/2

Metric Conversion

Bolt Diameter Conversion	
Inches	Millimeters
3/8	9.50
1/2	12.70
5/8	15.90
3/4	19.10
7/8	22.20
1	25.40
1-1/8	28.58
1-1/4	31.75