

The SNP3 Skewed Nail Plate is designed for connecting square cut corner jack trusses at skews from 0° to 90°, as depicted in **Figure 1 below**. An alternate installation for front side attachment at skews 0° to 45° is depicted in Figure 2 below.

**Materials:** 16 gauge  
**Finish:** G90 galvanizing  
**Codes:** See chart for code references

**Installation:**



- **Bend angle only once.**
- 8d common (0.131" dia. x 2-1/2" long) nails may be used in lieu of 8d (0.131") x 1-1/2" nails with no reduction in load.

**Typical Installation (Figure 1):**


- Attach the SNP3 to the supported truss on the acute angle side so the SNP3 runs behind the end of the jack truss. Use all the specified fasteners listed in the table below. The fasteners should be installed nearest to bend line as possible then working to the opposite end of flange. Not all nail holes will be filled.
- Set the jack truss against the supporting truss and nail the exposed flange of the SNP3 into place. Use all the specified fasteners listed in the table below. The fasteners should be installed nearest to bend line as possible then working to the opposite end of flange. Not all nail holes will be filled.

**Alternate Installation (Figure 2):**

- Attach the SNP3 to the supported truss on the obtuse angle side so the SNP3 is on the front side of the jack truss. Use all the specified fasteners listed in the table below. The fasteners should be installed nearest to bend line as possible then working to the opposite end of flange but no closer than 5/8" from the end of the truss. Not all nail holes will be filled.
- Set the jack truss against the supporting truss and nail the exposed flange of the SNP3 into place. Use all the specified fasteners listed in the table below. The fasteners should be installed nearest to bend line as possible then working to the opposite end of flange. Not all nail holes will be filled.

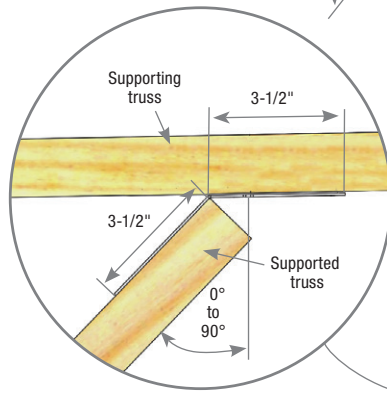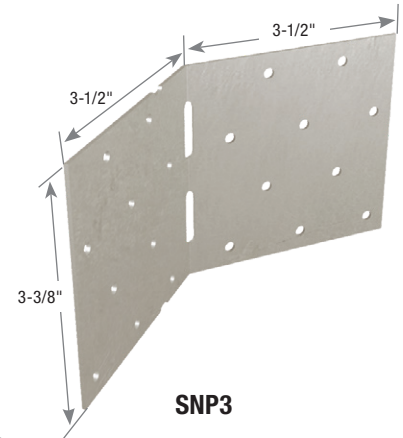

**Typical SNP3 installation  
Figure 1**

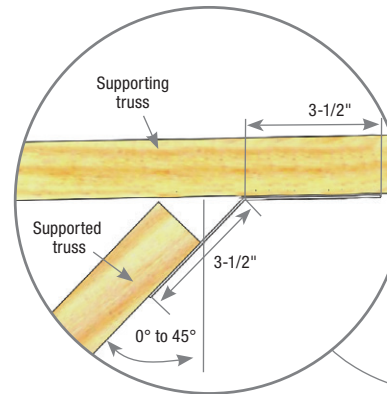

**Alternate SNP3 installation  
Figure 2**



MiTek USP Stock No.	Ref. No.	Steel Gauge	Installation Type <sup>4</sup>	Fastener Schedule <sup>2</sup>				DF/SP		S-P-F		Code Ref.
				Supporting Member		Supported Member		Allowable Loads (Lbs.) <sup>1</sup>		Allowable Loads (Lbs.) <sup>1</sup>		
				Qty	Type	Qty	Type	Download (100/115/125)	Upift 160%	Download (100/115/125)	Upift 160%	
SNP3	TJC37	16	Figure 1	6	8d x 1-1/2	6	8d x 1-1/2	475	475	415	415	IBC, FL, LA
			Figure 2	6	8d x 1-1/2	6	8d x 1-1/2	335	335	295	295	--

1) Allowable loads have been increased 60% for wind or seismic loads; no further increase shall be permitted.  
 2) Install specified fasteners from the bend line out from each end. Not all nail holes will be filled.  
 3) When installing SNP3's back to back, the table loads shall be multiplied by a reduction factor of 0.78.  
 4) Refer to images for installation type.  
 5) **NAILS:** 8d x 1-1/2 nails are 0.131" dia. x 1-1/2" long.  
 New products or updated product information are designated in **blue font**.