



## U3D Test

spinner

propeller

Parts
M4-Modellmutter433
M4-Modellmutter432
M4-Modellmutter431
M4-Modellmutter430
M4-Modellmutter429
M4-Modellmutter428
02 - Unterlegring
03 - Spinner
04 - Propeller
Stehbolzen423
Stehbolzen422
Stehbolzen421
Stehbolzen420
Stehbolzen419
Stehbolzen
06 - Druckhuelse

Parts
07 - Mitnehmer
kugel-6002414
kugel-6002413
kugel-6002412
kugel-6002411
kugel-6002410
kugel-6002409
kugel-6002408
kugel-6002407
kugel-6002406
ir-6002
kugel-6002
ar-6002
DIN_912401
DIN_912400
DIN_912399
DIN_912398
DIN_912397
M4-Modellmutter395
M4-Modellmutter394
M4-Modellmutter392
M4-Modellmutter391
M4-Modellmutter389
M4-Modellmutter388
M4-Modellmutter386
M4-Modellmutter385
M4-Modellmutter383
M4-Modellmutter
Seegerscheibe-RA2,3380
Seegerscheibe-RA2,3379
Seegerscheibe-RA2,3378
Seegerscheibe-RA2,3377
Seegerscheibe-RA2,3376
Seegerscheibe-RA2,3374
Seegerscheibe-RA2,3373
Seegerscheibe-RA2,3372
Seegerscheibe-RA2,3371
Seegerscheibe-RA2,3
24 - Z5 Kipphebel-Bolzen

Parts
23 - Z4 Kipphebel-Bolzen
22 - Z3 Kipphebel-Bolzen
21 - Z2 Kipphebel-Bolzen
20 - Z1 Kipphebel-Bolzen
25 - Z1 Distanzhuelse
26 - Z2 Distanzhuelse
27 - Z3 Distanzhuelse
28 - Z4 Distanzhuelse
29 - Z5 Distanzhuelse
Kipphebel357
Kipphebel356
Kipphebel354
Kipphebel353
Kipphebel351
Kipphebel350
Kipphebel348
Kipphebel347
Kipphebel345
Kipphebel
Ventil-Sicherung342
Ventil-Sicherung341
Ventil-Sicherung339
Ventil-Sicherung338
Ventil-Sicherung336
Ventil-Sicherung335
Ventil-Sicherung333
Ventil-Sicherung332
Ventil-Sicherung330
Ventil-Sicherung
Ventilfeder-Teller327
Ventilfeder-Teller326
Ventilfeder-Teller324
Ventilfeder-Teller323
Ventilfeder-Teller321
Ventilfeder-Teller320
Ventilfeder-Teller318
Ventilfeder-Teller317
Ventilfeder-Teller315
Ventilfeder-Teller

<b>Parts</b>
Ventifeder312
Ventifeder311
Kipphebelbock310
Ventifeder308
Kipphebelbock307
Ventifeder306
Kipphebelbock304
Ventifeder303
Ventifeder302
Kipphebelbock300
Ventifeder299
Ventifeder298
Kipphebelbock
Ventifeder295
Ventifeder
DIN_912292
DIN_912291
DIN_912290
DIN_912289
DIN_912287
DIN_912286
DIN_912285
DIN_912284
DIN_912282
DIN_912281
DIN_912280
DIN_912279
DIN_912277
DIN_912276
DIN_912275
DIN_912274
DIN_912272
DIN_912271
DIN_912270
DIN_912269
Einstellschraube267
Einstellschraube266
Stoesselbuchse265
Stoesselbuchse264

Parts
Stoesselstange263
Stoessel262
Stoesselstange261
Stoessel260
Einstellschraube258
Einstellschraube257
Stoesselbuchse256
Stoesselbuchse255
Stoesselstange254
Stoesselstange253
Stoessel252
Stoessel251
Einstellschraube249
Einstellschraube248
Stoesselstange247
Stoessel246
Stoesselstange245
Stoesselbuchse244
Stoessel243
Stoesselbuchse242
Stoesselbuchse240
Stoesselbuchse239
Stoessel238
Stoessel237
Stoesselstange236
Stoesselstange235
Einstellschraube234
Einstellschraube233
Stoesselbuchse231
Stoesselbuchse
Stoessel229
Stoessel
Stoesselstange227
Stoesselstange
Einstellschraube225
Einstellschraube
ventil-fuehrung222
ventil-fuehrung221
ventil-fuehrung219

Parts
ventil-fuehrung218
ventil-fuehrung216
ventil-fuehrung215
ventil-fuehrung213
ventil-fuehrung212
ventil-fuehrung210
ventil-fuehrung
65 - Nockengehaeuse
66 - Nockenscheibe
kugel-6003205
kugel-6003204
kugel-6003203
kugel-6003202
kugel-6003201
kugel-6003200
kugel-6003199
kugel-6003198
kugel-6003197
kugel-6003196
kugel-6003195
kugel-6003194
kugel-6003193
kugel-6003192
kugel-6003191
kugel-6003190
kugel-6003189
kugel-6003188
ar-4202
kugel-6003186
kugel-6003185
ir-4202
68 - distanz-d15
69 - zr-22-kurbelwelle
70 - zr15
71 - zr-22
72 - zahnkranz-60z
73 - zyl-stift-6x20
Ansaugrohr176
Ueberwurfmutter-M10x1175

Parts
Auspuffrohr174
Ueberwurfmutter-M10x1173
Auspuffrohr171
Ueberwurfmutter-M10x1170
Ansaugrohr169
Ueberwurfmutter-M10x1168
Auspuffrohr166
Ueberwurfmutter-M10x1165
Ueberwurfmutter-M10x1164
Ansaugrohr163
Auspuffrohr161
Ueberwurfmutter-M10x1160
Ueberwurfmutter-M10x1159
Ansaugrohr158
Auspuffrohr
Ueberwurfmutter-M10x1155
Ansaugrohr
Ueberwurfmutter-M10x1
DIN_912151
DIN_912150
DIN_912149
DIN_912148
DIN_912147
102 - zylinder
103 - zylinder
104 - zylinder
105 - zylinder
106 - zylinder
101 - zyl_buchse
100 - zyl_buchse
99 - zyl_buchse
98 - zyl_buchse
97 - Z1 zyl_buchse
96 - Gehauserueckwand
ventil134
ventil133
ventil131
ventil130
ventil128

Parts
ventil127
ventil125
ventil124
ventil122
ventil
82 - zyl-kopf
80 - zyl-kopf
79 - zyl-kopf
84 - zyl-kopf
81 - zyl-kopf
DIN_912114
DIN_912113
DIN_912112
DIN_912111
DIN_912109
DIN_912108
DIN_912107
DIN_912106
DIN_912104
DIN_912103
DIN_912102
DIN_912101
DIN_91299
DIN_91298
DIN_91297
DIN_91296
DIN_91294
DIN_91293
DIN_91292
DIN_91291
145 - kurbel_gehaeuse
161 - kurbelwelle
130 - pleuel87
131 - pleuel
132 - pleuel
133 - pleuel83
Bolzen_sicherg81
Bolzen_sicherg80
Bolzen_sicherg79



Parts
Bolzen_sicherg78
Bolzen_sicherg77
Bolzen_sicherg75
Bolzen_sicherg74
Bolzen_sicherg73
Bolzen_sicherg72
Bolzen_sicherg
kolbenbolzen69
kolbenbolzen68
kolbenbolzen67
kolbenbolzen66
kolbenbolzen65
Rolle-nki9-1262
Rolle-nki9-1261
Rolle-nki9-1260
Rolle-nki9-1259
Rolle-nki9-1258
Rolle-nki9-1257
Rolle-nki9-1256
Rolle-nki9-1255
Rolle-nki9-1254
Rolle-nki9-1253
Rolle-nki9-1252
Rolle-nki9-1251
Rolle-nki9-1250
Rolle-nki9-1249
Rolle-nki9-1248
Rolle-nki9-12
Ar-nki9-12
Ir-nki9-12
135 - Haupt_pleuel
140 - sich_scheibe-1
111 - sich_scheibe
112 - Seegerscheibe-RA7
kugel-600339
kugel-600338
kugel-600337
kugel-600336
kugel-600335

Parts
kugel-600334
kugel-600333
kugel-600332
kugel-600331
kugel-600330
kugel-600329
ar-6003
kugel-6003
ir-6003
DIN_91224
DIN_912
kolbenbolzen21
kolbenbolzen20
kolbenbolzen19
kolbenbolzen
Kolbenring16
kolben15
Kolbenring13
kolben12
Kolbenring10
kolben9
Kolbenring7
kolben6
Kolbenring
kolben

This Service Bulletin describes how to replace the CLS sensor, and if necessary, the sensor cable. If the new sensor is identical to the sensor being replaced, the cable is not needed. If an old-style sensor is being replaced with a newer-style sensor, the cable must be replaced and routed as described here.

## Overview

The parts included in each kit are shown here. Please ensure all parts are present before starting this procedure.

**Table 1: Parts in SB230KIT-A: No Cable Needed**

Qty.	Part Description	Part #
1	CLS sensor	92090-501

<b>Supplies Needed: Kit A</b>
Lockout/tagout equipment



**Table 1: Parts in SB230KIT-A: No Cable Needed**

Qty.	Part Description	Part #
1	Service Bulletin document	SB230

Supplies Needed: Kit A
Lock-jaw pliers
Slotted screwdriver

**Table 2: Parts in SB230KIT-B: Includes Cable**

Qty.	Part Description	Part #
1	CLS sensor	92090-501
1	Sensor cable	515759
8	Cable ties	508704
1	Service Bulletin document	SB230



Supplies Needed: Kit B
Lockout/tagout equipment
Lock-jaw pliers
Slotted screwdriver
Hex key set
Duct or masking tape
Wire strippers
Wire cutters
Cutters for cable ties

If you have any questions, call MiTek Machinery Division Customer Service at 800-523-3380.

## Procedure





### Electrical Lockout/Tagout Procedures

	 <b>WARNING</b>
	<p><b>ELECTROCUTION HAZARD!</b></p> <p>Verify that all power to the machine has been turned off and follow approved lockout/tagout safety procedures before performing any maintenance.</p> <p>All electrical work must be performed by a qualified electrician.</p> <p>If it is absolutely necessary to troubleshoot an energized machine, follow NFPA 70E for proper procedures and personal protective equipment.</p>

#### When Working on a Machine Outside the Machine’s Main Electrical Enclosure

Before performing maintenance on any machine with electrical power, lockout/tagout the machine properly. When working on a machine outside of the machine’s main electrical enclosure, not including work on the electrical transmission line to the machine, follow your company’s approved lockout/tagout procedures which should include, but are not limited to the steps here.

1. Engage an E-stop on the machine.
2. Turn the disconnect switch handle on the machine’s main electrical enclosure to the “off” position. See Figure 1.


	 <b>WARNING</b>
	<p><b>ELECTROCUTION HAZARD.</b></p> <p>When the disconnect switch is off, there is still live power within the disconnect switch’s enclosure. Always turn off power at the building’s power source to the equipment before opening this electrical enclosure!</p>

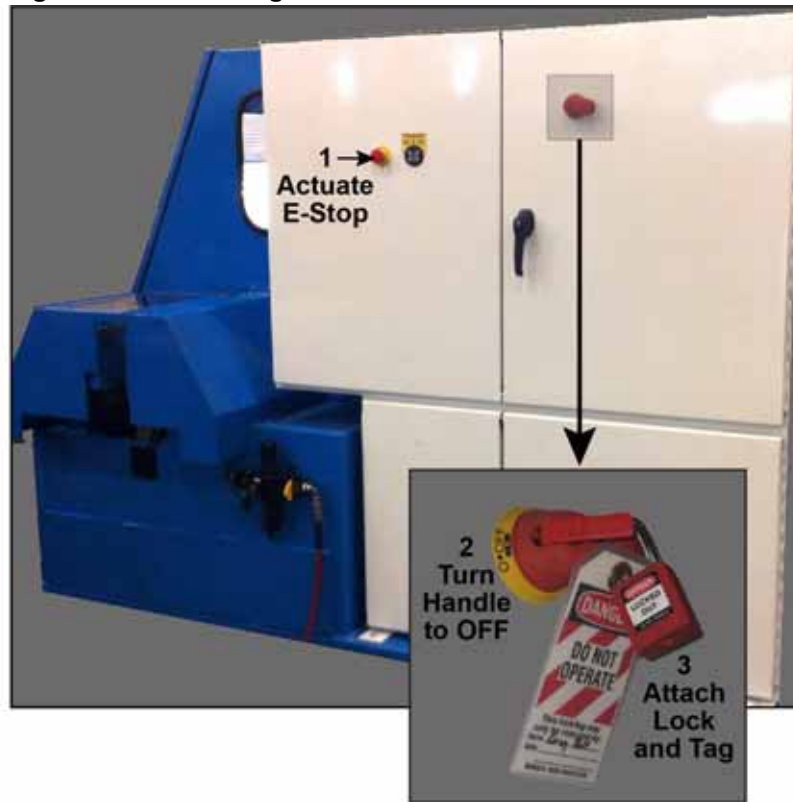3. Attach a lock and tag that meets OSHA requirements for lockout/tagout.







Because the bottom half of the main electrical enclosure is separated from the top half and only has 24-volt power, it is considered “outside the machine’s main electrical enclosure” for lockout/tagout purposes.

Figure 1: Lockout/Tagout on the Main Electrical Enclosure



### Pneumatic System Lockout/Tagout Procedure

	 <b>WARNING</b>
	<p><b>MOVING PARTS CAN CRUSH AND CUT.</b></p> <p>Always verify that power to the machine has been turned off and follow approved lockout/tagout procedures.</p> <p>Turn off the air switch before performing any maintenance on the equipment.</p>


	 <b>WARNING</b>
	<p><b>HIGH PRESSURE HAZARD.</b></p> <p>Bleed pneumatic lines before performing any maintenance on the pneumatic system.</p>



## Replacing the CLS

1. Remove old CLS sensor as shown in Figure 2.

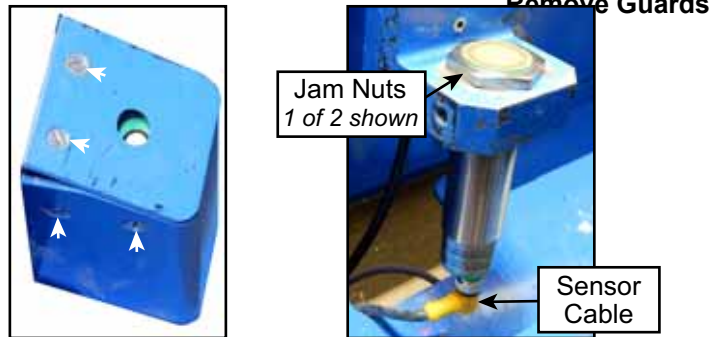
**Figure 2: Remove Parts Shown**



2. Install the new CLS sensor:

- a) Prepare the new CLS sensor as shown in Figure 4.
- b) Insert the sensor from the bottom of the bracket and place the second jam nut on from the top.
- c) Tighten both jam nuts so the sensor top surface is flush with the jam nut's top surface.
- d) Tighten the lower jam nut.

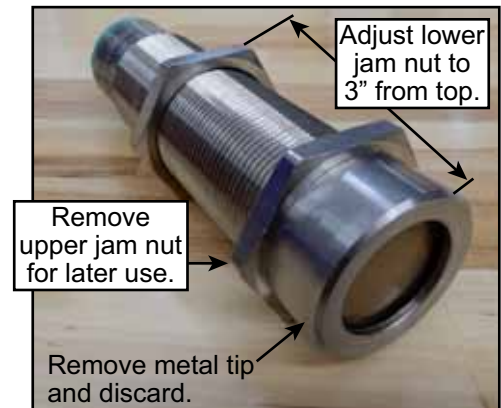**Figure 4: Prepare the New CLS**




3. Determine your next step depending on which sensor style was just replaced.

**If your old sensor looks like this...**



**Go to page 17.**

**If your old sensor looks like this...**




**Go to page 16.**

## Completion Steps if Replacing the Same Style Sensor

If the old and new sensors are identical, the same sensor cable can be used.

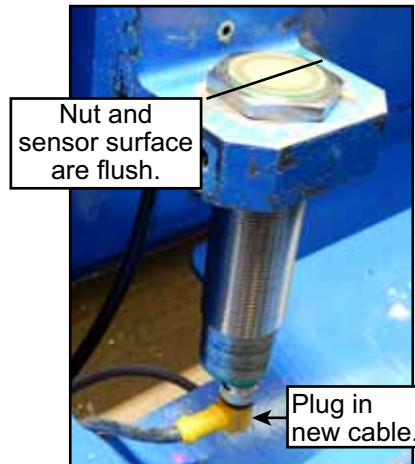**Figure 5: Adjust Nuts**



1. Ensure the nuts are adjusted correctly so the top of the top jam nut and the top surface of the sensor are flush as shown in Figure 5.
2. Plug the existing sensor cable into the bottom of the CLS sensor.
3. Attach the sensor guards and front door.
4. Restore power.
5. Run a few test cuts to ensure the CLS is working.


PROCEDURE FOR NEW STYLE SENSOR REPLACEMENT IS COMPLETE.

## Completion Steps if Replacing an Old Sensor With a New

If the new sensor is a different style than the one replaced, the sensor cable must also be replaced. Follow these steps to replace the sensor cable and complete the CLS procedure.

1. Remove the angled guard behind the pneumatic regulators shown in Figure 6.

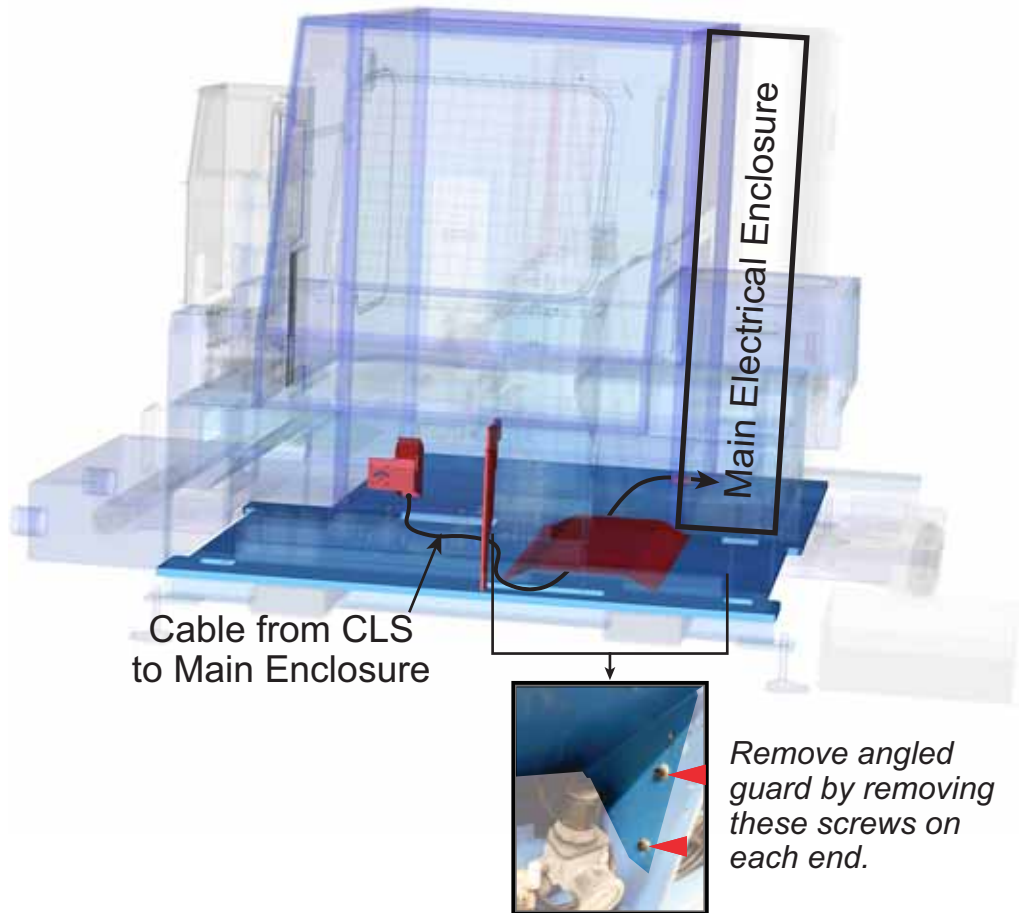**Figure 6: Cable Routing Overview and Guard to Remove**





2. Unsecure the OLD sensor cable using these steps:

- a) At the front of the saw, locate the end of the old sensor cable that was removed from the sensor earlier. It is shown in Figure 7.
- b) Follow the old sensor cable's route into the bottom of the stroke/elevation chamber and cut any cable ties securing it to other cables.
- c) Inside the stroke/elevation chamber, continue to follow the route and cut any cable ties securing it.
- d) At the front of the saw, on the OLD sensor cable, cut the cable connector off as shown in Figure 7.

**Figure 7: Cut Connector Off**



3. Connect the old cable to the new cable per Figure 8.

**Figure 8: Connect the Old and New Cables**

OLD cable end where connector was cut off.

Piggyback new cable onto old cable.



Cover with masking or duct tape to prevent snagging.

4. From inside the stroke/elevation chamber: Loosen the fitting shown in Figure 9. Have a second person go inside the bottom half of the main electrical enclosure and watch while you “jiggle” the cable labeled OLD in Figure 9.
5. From inside the bottom half of the main electrical enclosure: Locate the cable being removed (jiggled in previous step) and cut it near the fitting. Leave it attached to its termination points for reference later.
6. From inside the stroke/elevation chamber: Perform the steps in Figure 9.


**Figure 9: Inside the Stroke/Elevation Chamber**



- a) Pull the old cable (cut from other side) into the stroke/elevation chamber.
- b) Pull other end until masking tape enters stroke/elevation chamber.
- c) Remove the tape and discard the OLD cable that is now loose on both ends.
- d) Thread NEW cable through fitting so it enters the bottom electrical enclosure.


7. In the bottom half of the main electrical enclosure, prepare the NEW sensor cable for termination using these steps:
  - a) Temporarily leave the old cable connected at the terminals to identify which terminals to use.
  - b) Continue to pull the new cable through the enclosure wall (from the stroke/elevation chamber) and route it through the cable-ways.
  - c) Trim the NEW cable to the length needed to reach the termination points currently used by the old cable (and shown in Figure 11).
  - d) Trim the cable insulation off as needed to access the individual wires.
  - e) Cut and discard the parts labeled in Figure 10.
  
8. Remove the OLD cable from its terminals, and terminate each wire in the NEW cable according to Figure 11.

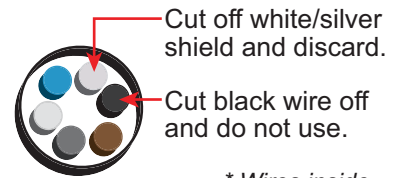**Figure 10: Cable Wires**



*\* Wires inside cable may be different order than shown.*

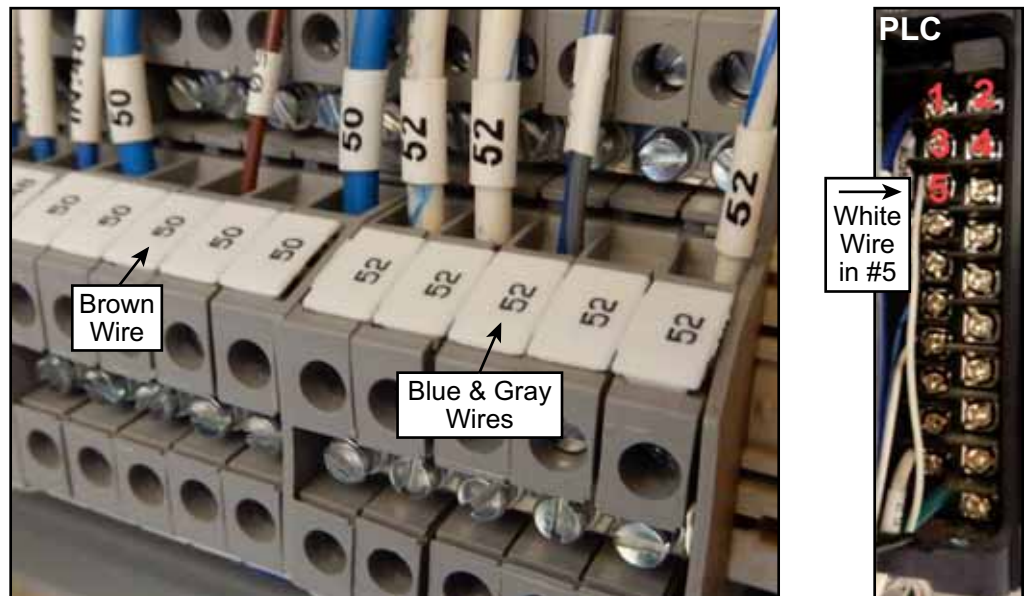
**Figure 11: Wire Termination Points Inside the Bottom Main Electrical Enclosure**



9. Finish the cable routing and connections with these steps:

- a) Once the new cable is routed, follow its complete route and add new cable ties wherever necessary to keep your enclosures and chambers neat and safe.
- b) Ensure the fitting in the stroke/elevation chamber (shown in Figure 9) has been tightened in place.
- c) Ensure the nuts are adjusted correctly so the top of the top jam nut and the top surface of the sensor are flush as shown in Figure 12.
- d) From the front of the saw, finish routing the connector-end of the new cable and plug the cable into the bottom of the CLS sensor.

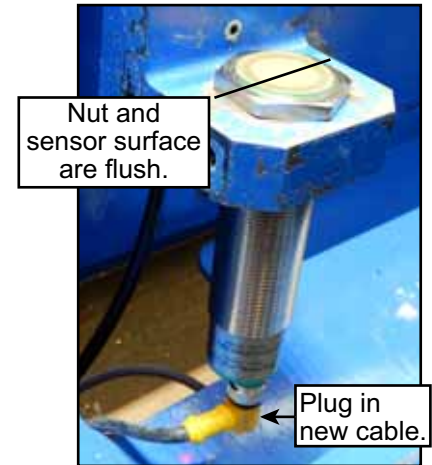**Figure 12: Adjust Nuts**



10. Re-assemble and test the saw:

- a) Attach the sensor guards, angled guard, and front door.
- b) Restore power.
- c) Perform CLS calibration using the *BLADE* software.
- d) Run a few test cuts to ensure the CLS is working.

PROCEDURE FOR OLD STYLE SENSOR REPLACEMENT IS COMPLETE.