



**Disclaimer:** Some of the products displayed are optional and not estimated

# Deck Hardware Installation

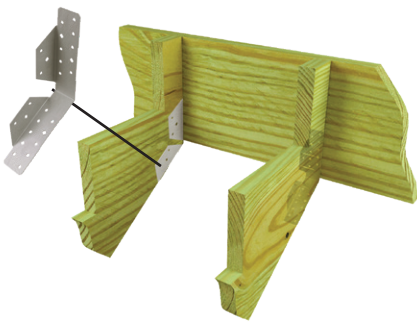


Typical CSH-TZ installation

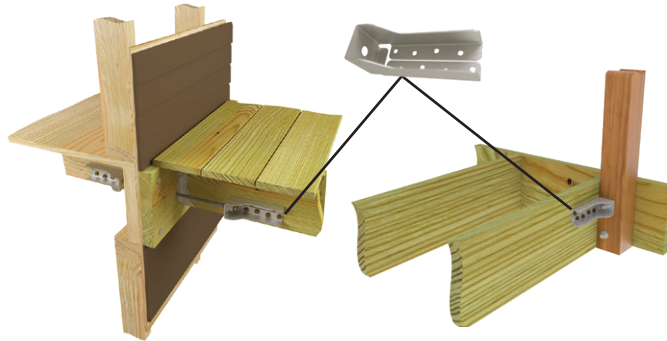


Typical DTB-TZ installations




Typical ADTT-TZ installation




Typical PA-TZ installation

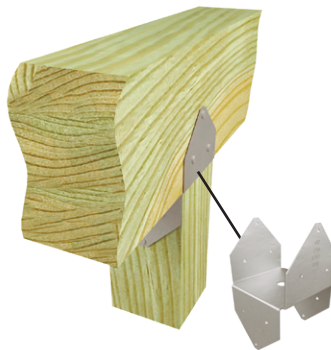


Typical C44-TZ installation

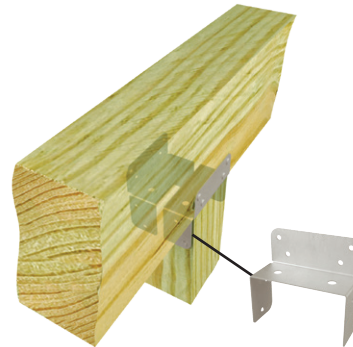


Typical PB44-6TZ installation

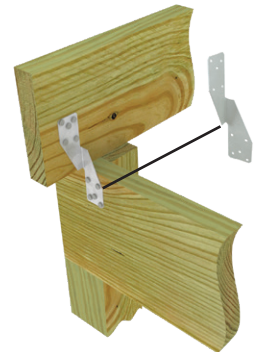

Typical RT7A installation

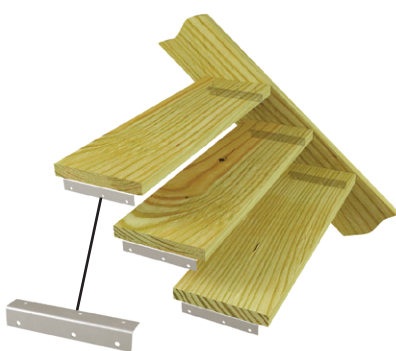

Typical SCA9-TZ installation

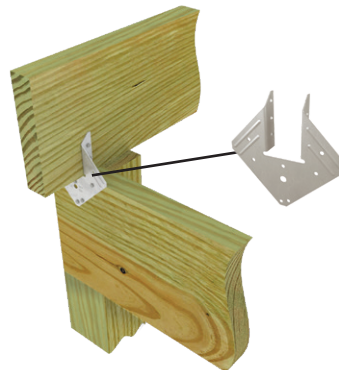

Typical RT15-TZ installation


The type and quantity of fasteners used to install MiTek products is critical to connector performance. MiTek has a full range of structurally-rated fasteners for wood frame structures. Hot-dip galvanized, stainless steel, and Gold Coat corrosion resistant finishes are available for exterior applications.



## MiTek Deck Hardware is available in Triple Zinc (TZ) and Gold Coat (GC).



**TZ galvanizing** provides a prefabrication coating of 1.85 (G-185) ounces of zinc per square foot of surface area (both sides) measured in accordance with ASTM A 653. Use with Hot-dip galvanized fasteners.



**Gold Coat** is a proprietary multi-layer protection system. It is comprised of an organic top coat barrier layer and a zinc layer placed over a steel substrate. Use with Gold Coat or Hot-dip galvanized fasteners.