


The newest addition to our line of Tension Ties is the HTT45 which provides an increased load carrying capacity by utilizing the diamond hole nailing pattern. Easily installs with 10d or 16d nails, the 16d Max nailing can be used when lower deflections are required by design. As an alternate to nail installations, the HTT45KT is sold as a kit with the HTT45 holddown and MiTek's LumberLok LL930 screws.

Features:

- May be installed above the sill plate (recommended maximum height 18")
- Easily installs as a retrofit tie to reinforce existing post and shear wall connections
- Fully integrated 3Ga washer provides positive load transfer to wood framing members
- No pre-drilling. Installs with 10d or 16d nails
- A tension tie with predeflected holddown load carrying capacity
- When installed using MiTek's 5/8" STB anchor bolt, the HTT45 Tension Tie becomes part of a fully-tested and structurally rated system
- HTT45KT installs with LumberLok screws (included) for increased design values

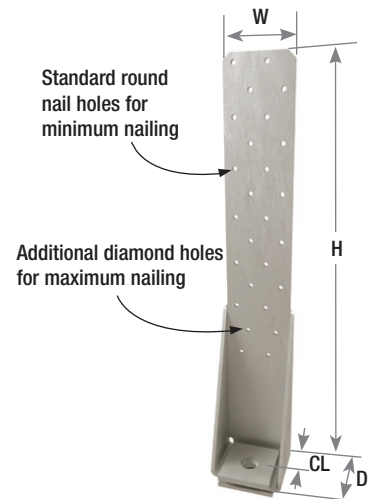

HTT45

Materials: Body - 10Ga ASTM A653 Galvanized
Washer - 3Ga ASTM A36

Finish: G90 galvanizing

Codes: IBC, FL, LA (HTT45)

Installation:

- Use all specified fasteners to attach the strap portion of the connector to the side of stud, post, joist, purlin, or beam. Secure the base to the concrete or masonry wall with specified anchor bolt. A design professional shall specify the type, length, and embedment of the anchor bolt.
- **HTT45 Min** – Fill all round nail holes.
- **HTT45 Max** – Fill all round and diamond nail holes.
- Washers are not required on transfer plates that fit over the anchor bolt.
- Tighten anchor bolt nut finger tight to base plus 1/3 to 1/2 additional turn with a wrench.
- MiTek LL930 LumberLok screws are included with HTT45KT.



Typical HTT45 max installation

MiTek Stock No.	Ref. No.	Steel Gauge	Dimensions (in)				Fastener Schedule					DF/SP Allowable Tension Loads (Lbs.) ¹		Ctn Qty	
			W	H	D	CL	Anchor Bolt ³		Strap			Tension 160%	Δ (in) ^{4,5}		
							Min/Max	Qty	Dia. (in)	Qty	Type ^{2,7,8}				Nail Spacing (in)
HTT45	HTT4, HTT5	10	2-1/2	16	2	1-3/8	Min	1	5/8	18	10d	1-3/4	4215	0.115	10
										16d x 2-1/2	4160		0.108		
							Max	1	5/8	26	10d		5795	0.101	
										16d x 2-1/2	5005				
HTT45KT ⁶	HTT5KT	10	2-1/2	16	2	1-3/8	--	1	5/8	26	LL930	1-3/4	5865	0.113	10

1) Allowable loads have been increased 60% for wind or seismic loads; no further increase shall be permitted.
 2) 16d sinkers may be substituted for the specified 10d common nails with no load reduction.
 3) 16d common nails may be substituted for the specified 16d x 2-1/2" nails with no load reduction.
 3) The designer must specify anchor bolt type, length and embedment depth.
 4) Deflections are derived from static, m/c
 5) HTT holdowns raised off of the sill plate may have higher deflection values.
 6) HTT45KT is sold as a kit and includes (1) HTT45 and (26) LL930 screws.
 7) LL930 LumberLok Screws are #9 x 2-7/8-in. long.
 8) **NAILS:** 10d nails are 0.148-in. dia. x 3-in. long, 16d x 2-1/2" nails are 0.162-in. dia. x 2-1/2-in. long.