




PW3 PUCK WASHER INSTALLATION

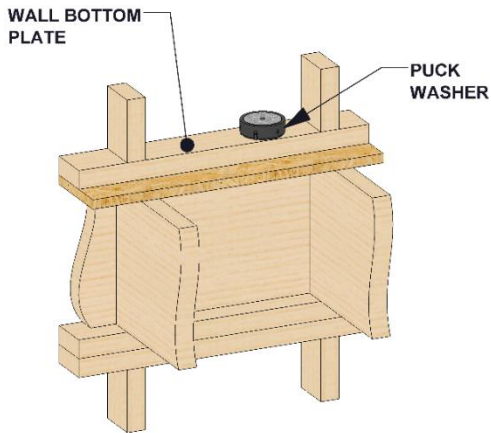


- 1) Place the Puck Washer on the wall bottom plate. The Puck Washer should be centered on the wall bottom plate.

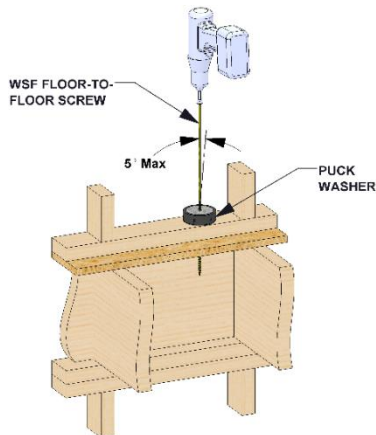

- 2) Insert the screw thru the hole in the Puck Washer and drill into the floor cavity. The screw should be driven in vertically ± 5 degrees.

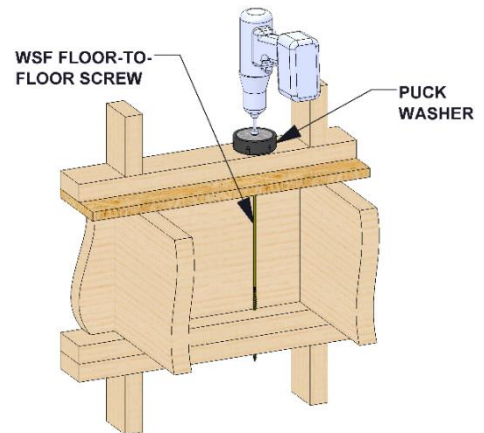

- 3) Engage the screw into the double top plate of the wall below. Tighten the screw, compressing the puck washer and releasing the internal expansion device.

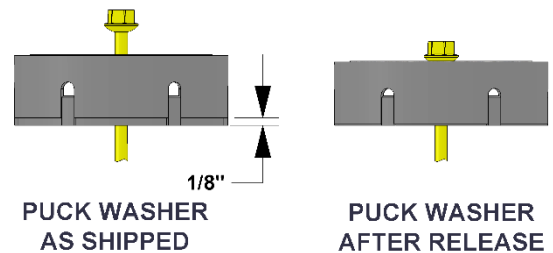

- 4) Before installation, the cover of the Puck Washer is raised about 1/8 inch. Compressing the washer triggers the release of the internal expansion device. In a quiet environment, you will hear an audible click when the expansion device releases.

PW3 PUCK WASHER INSTALLATION

