

MRT7 Rafter Tie

Manufactured Housing Connectors

MH Connectors

The MRT7 Rafter Tie is engineered for wood frame structures built in a factory environment. These connectors feature embossed "nailing zones" for faster and safer fastener installation.

Materials: 14 gauge
Finish: G90 galvanizing

Installation:

- Install all specified fasteners using a pneumatic nailer.
- Nailing zones are distinguished by embossed pattern.
- Install fasteners with care not to overdrive fastener causing indentation of connector.
- Fastener quantities shall be installed symmetrically on both sides of connector.
- Installer should reduce risk of injury from rebounding fasteners by using personal eye protection during fastener installation.
- Minimum center-to-center fastener spacing is 1".



Typical MRT7 installation



Typical Knee Wall Set with MRT7 installation



MiTek USP Stock No.	Ref. No.	Steel Gauge	Dimensions (in)		Fastener Schedule ^{1,2,3}			DF/SP Allowable Loads (Lbs.)			S-P-F Allowable Loads (Lbs.)			Code Ref.
			W	L	Header Qty	Joist Qty	Type	Uplift ⁴ 160%	F1 160%	F2 160%	Uplift ⁴ 160%	F1 160%	F2 160%	
MRT7	MMH8	18	1-1/4	7-13/16	3	3	P or "T" nails	295	135	135	255	85	85	--
					4	4	P or "T" nails	390	180	180	340	115	115	
					5	5	P or "T" nails	490	195	195	425	145	145	
					6	6	P or "T" nails	585	195	195	510	175	175	

- 1) "P" nails denotes fasteners designed specifically to be installed with a pneumatic-powered nailer. The fasteners shall be either of a type with round heads, 0.105" diameter and 1-3/8" long; or a "T" shaped head, 0.097" diameter, 1-1/4" long and hardened; or a similar but larger fastener.
- 2) Fasteners shall be pneumatically driven in such a way as firmly seats the nail head against the hanger steel, without embedding the nail head completely through the plane of the metal surface, or otherwise punching through.
- 3) The quantity of nails installed shall be equally distributed to both sides of the hanger. The nails shall be located at 1" spacing in a row, with the vertical rows spaced at 3/8"; also no less than 5/16" from a sheared edge and no less than 5/16" from a formed edge.
- 4) Uplift loads have been increased 60% for wind or seismic load conditions; no further increase shall be permitted.


SPTHW Stud Plate Ties

MiTek's SPTHW is a Stud Plate Tie that can be installed on the top and bottom of each stud at the component plant to stiffen for shipping and handling. Designed to be installed over 1/2" structural sheathing.


Materials: 18 gauge
Finish: G90 galvanizing
Codes: IBC, FL, LA

Installation:

- Install all specified fasteners.



SPTHW

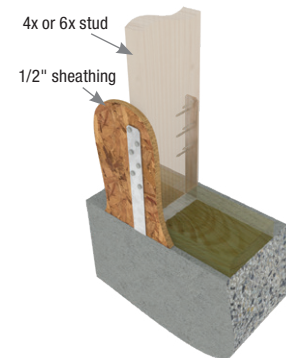

Typical SPTHW installation

Stud Size	MiTek USP Stock No.	Ref. No.	Steel Gauge	Dimensions (in)		Fastener Schedule ²		DF/SP Allowable Loads (Lbs.)	Code Ref.
				W	H	Qty	Type	Uplift 160% ¹	
4x	SPTHW4	SPH4R	18	4-1/16	8-3/8	12	10d x 1-1/2	2195	IBC, FL, LA
6x	SPTHW6	SPH6R	18	6-1/16	9-1/8	12	10d x 1-1/2	2195	FL, LA

- 1) Uplift loads have been increased 60% for wind or seismic loads; no further increase shall be permitted.
- 2) **NAILS:** 10d x 1-1/2 nails are 0.148" dia. x 1-1/2" long.

Copyright © 2020 MiTek Industries, Inc. All Rights Reserved