


FT SPLICER™

A small rotary-feed press for splicing short pieces of lumber together.

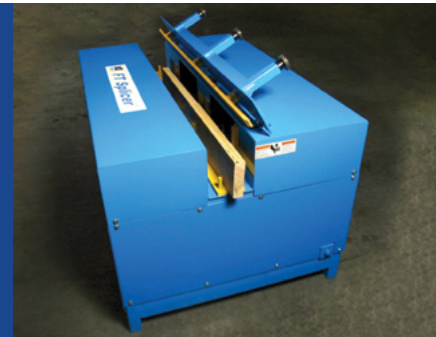

PHYSICAL DATA

Dimensions	54" L x 38" W x 32" D
Clamp / press mechanism	Rotary drum
Motor	2 hp
Approximate weight	1,500 lbs

PERFORMANCE DATA

Cycle time	5 seconds
Pressing capacity	50 tons
Max. operating pressure	100 psi
Lumber length	Min. length of any board: 12" Min. total length: 27' 1/2" Max. length of any board: Unlimited
Lumber capacity	2x3, 2x4, 2x6
Plate embedment	100 percent
Plate capacity	18 gauge high-strength or 20 gauge
HMI	Dual pushbuttons

FEATURES

- Rotary drum holds the boards together and presses the plate.
- Operation controlled by one person.

ELECTRICAL DATA

Electrical specs

460 VAC

60 Hz

3-phase (other voltages require transformer)

FLA plus control amps

8 amps

Disconnect protection

15 amps

SAFETY DATA

E-stops

Pushbutton

Safety compliance

UL (panels), OSHA

Labels

Bilingual or ISO