

HARDY FRAME[®] PANEL IN A BACK-TO-BACK INSTALLATION

STRAPS


For portal installations, straps can be installed on the cavity face with self-tapping screws. Panels can also be ordered with straps welded by the manufacturer.

WIDTH

Back to Back installations maintain the narrow wall length to accommodate large openings. Panels are installed in tandem instead of side-by-side.

CONCRETE ANCHORAGE ACCESSORIES

Templates and Bolt Braces for Back to Back installations assure accurate placement and provide bracing to prevent independent sway of anchors when concrete is poured.

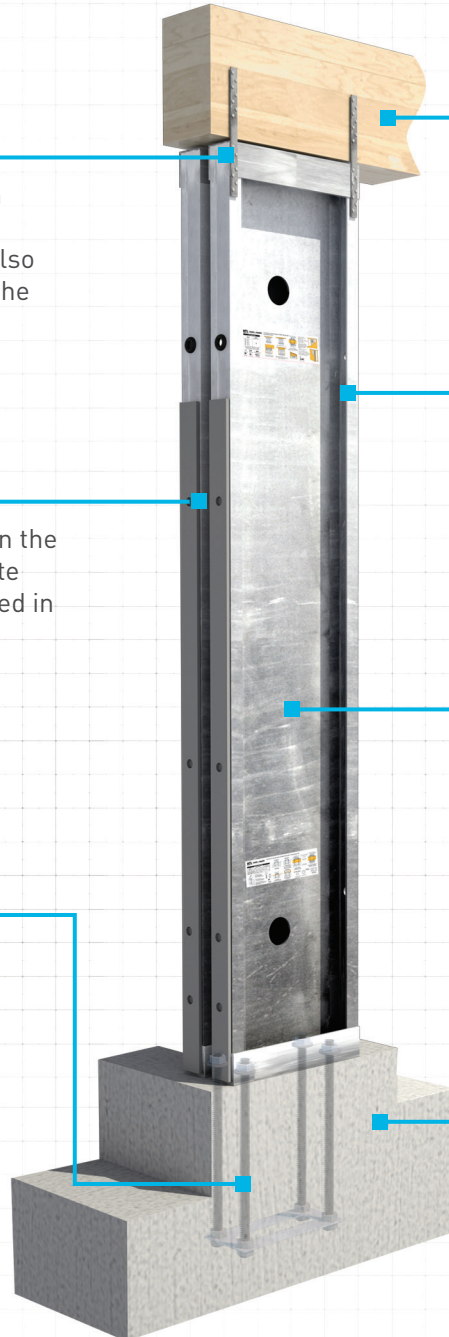

COLLECTORS

Nominal 8x beams or double 2x8 top plates transfer shear forces equally into both Panels

PANEL SHAPE

The cavity of the C-Shape can be used to recess fixtures like porch lights, switches and sockets, install wood backing and can be insulated.

DOUBLE CAPACITY

Back to Back Panel installation in nominal 8 inch wall framing provides the full capacity for each Panel without increasing the wall length or encroaching on openings.

ECONOMICAL OPTIONS

“Back to Back Reinforced Anchorage” solutions and details are available to keep foundation concrete to a minimum.