

WON'T CRACK UNDER PRESSURE, EVEN IF THE CONCRETE DOES.

Our structural concrete epoxy is designed for anchoring into concrete that is, or may become, cracked due to cyclic loading from wind or earthquakes. It may also be used with fully grouted CMU construction.

- 15 minute gel time and 8 hour cure time
- Use with threaded steel rod or deformed rebar
- Can be installed in dry or water filled holes
- Use in over head installations

To place your order,
call **800-328-5934**




**EPOXY
QUANTITY
ESTIMATOR**

Do you need to know how much epoxy your job needs?
Quickly calculate the number of cartridges using the USP
Epoxy Quantity Estimator. Run our web application on your desktop,
smart phone or tablet from anywhere with an internet connection.

Learn more at USPconnectors.com/CIA7000C

©2017 MITEK, ALL RIGHTS RESERVED.

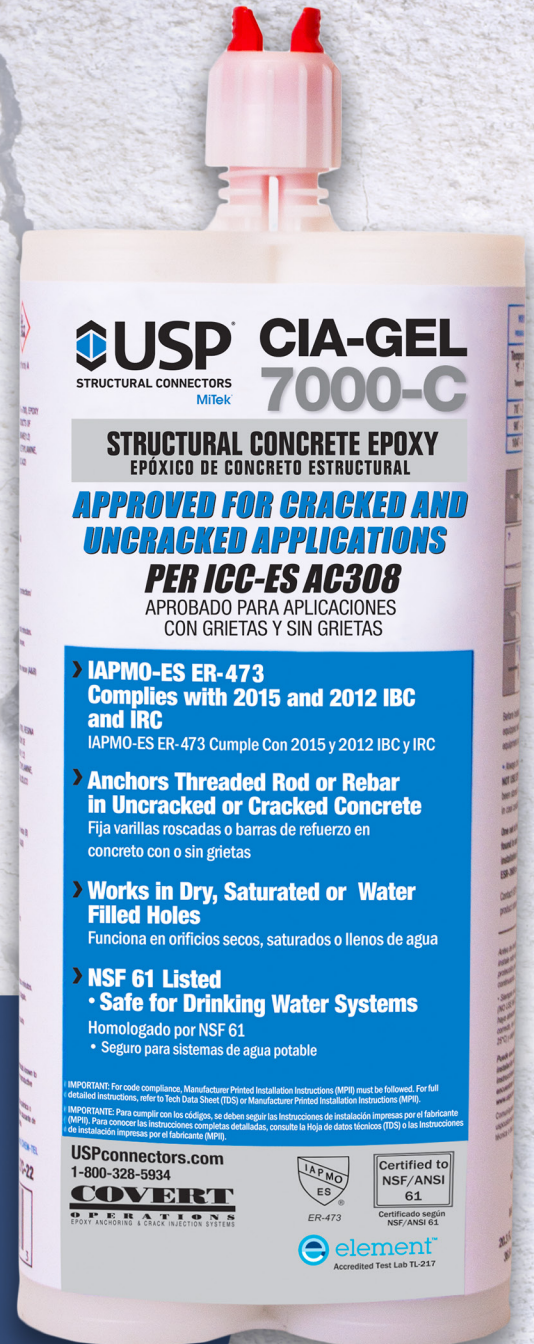

MiTek
THE NEW STANDARD